



BPI COMPONENT GUIDE:

12GA DISPERSOR-X

WWW.BALLISTICPRODUCTS.COM


The original Dispersor-X is ideal for close-range shots of 5-25 yards. The integrated X-shaped spreader device molded directly into the shotcup provides shooters with even pellet distribution. Its G-type crush section reduces felt recoil in the 12-gauge while allowing a variety of load height adjustments. The pegged dome gas seal effectively distributes fast burn rate powders. Use of an overshoot card (we like the #COS12 Clear Overshot Disc) helps create a bit of compression which will produce an even pattern distribution.

Identifying features: The DX12 dimensions are nearly identical to those of the DX12S with one important difference. Note the 24 pins that protrude down from the gas seal in two circular designs around one central pin. The obturator pins occupy space that would otherwise be filled with propellant, thus lifting the DX12S wad higher above the propellant charge. This change results in approximately a 1/4" increase in wad height in the hull. Use the DX12 for heavier shot drops and bulkier propellants.

“★★★★★ - Turns your full-choke into a skeet gun!! Works great! Turns a fixed full-choked gun into a skeet gun - gives patterns 2 - 3 times bigger!” - Arto, MA

RECOMMENDED MANUALS

There is so much more to shotshell reloading than just the load data. Safety is your TOP priority. In order to become a safe and competent reloader, one must continue the learning process by reading and researching. Don't try to outsmart the instructions! We offer over a half century of loading knowledge, wit, and wisdom in our publications. Our manuals are continually upgraded with new data and the latest tools and techniques. Available in print version or downloads from our website. **Therefore, we encourage you to master the information in our manuals, brochures, and "Load of the Week" at www.ballisticproducts.com**

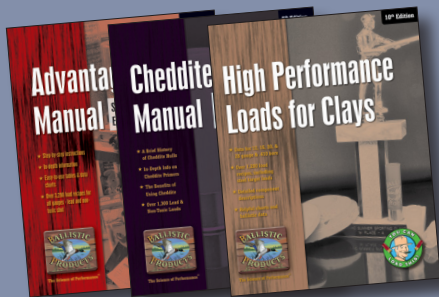

TECHNICAL SPECS:

OVERALL LENGTH:	1.504"
DIAMETER:	0.725"
SHOTCUP DEPTH:	0.900"
SEAL TO CUP BOTTOM:	0.600"
THICKNESS:	0.035"



LD12DX12



WARNING

Cancer and Reproductive Harm
- www.P65Warnings.ca.gov

LOAD ID	GA.	HULL	PRIMER	POWDER	POWDER GRNS.	GAS SEAL	WAD	FILLER WADS & LOAD INSERTS	OVER SHOT	SHOT (OZ.)	SHOT (GRNS.)	SHOT SIZE	BUFFER (GRAINS)	PSI	FPS
12-GAUGE • 2-3/4" LENGTH • LEAD SHOT • FOLD CRIMP															
141114-6121X8	12	Cheddite	Ched209	Bullseye	24.0	X12X	DX12			3/4	328.1	Lead #8		10500	1535
110801-3267	12	Fiocchi	Fio616	Clays	22.0	BPGS	DX12			3/4	328.1	Lead #8.5		9400	1490
110801-3271	12	Fiocchi	Fio616	Titegroup	24.0	X12X	DX12			3/4	328.1	Lead #8.5		10500	1580
110801-3269	12	Fiocchi	Fio616	Titewad	24.0	BPGS	DX12			3/4	328.1	Lead #8.5		11000	1560
110801-3280	12	Fiocchi	Fio616	700-X	22.0	BPGS	DX12				370.0	Lead #8.5		10200	1450
110801-3276R	12	Fiocchi	Fio616	Clays	23.5	BPGS	DX12				370.0	Lead #8.5		11000	1500
10908-866R	12	Fiocchi	Fio616	Bullseye	22.0		DX12			7/8	382.8	Lead		11000	1500
110801-3281	12	Fiocchi	Fio616	Clays	18.0	BPGS	DX12			7/8	382.8	Lead #8.5		8200	1220
110801-3282	12	Fiocchi	Fio616	Clays	20.0	BPGS	DX12			7/8	382.8	Lead #8.5		9300	1335
110801-3283	12	Fiocchi	Fio616	International	19.0	BPGS	DX12			7/8	382.8	Lead #8.5		7700	1135
120525-3917	12	Remington STS	Rem209P	Clays	17.6		DX12			7/8	382.8	Lead #8		8000	1105
110801-3285	12	Fiocchi	Fio616	Clays	19.0	BPGS	DX12			1	437.5	Lead #8.5		9300	1235
160602-8134	12	Fiocchi	Fio616	Clay Dot	18.5		DX12			1 1/8	492.2	Lead #8		9100	1175

OTHER USEFUL COMPONENTS



20GA 1/8" CORK WADS
18CW20 | #1222820




20GA 1/4" CORK WADS
14CW20 | #1222420



20GA 1/8" FELT WADS
18FW20 | #1221820



20GA 1/4" FELT WADS
14FW20 | #1221420



12GA OVERSHOT CARDS
0512 | #05 12

Filler & cushion wads occupy space below the pellets so that the load can be crimped properly. Remember, different payloads and different pellet sizes occupy different volumes, so you will want an assortment of sizes on hand. Overshot cards improve overall crimp quality and seal in small shot and/or buffer. We recommend 20 gauge felt or cork fillers for inside the 12 gauge wads.

WARNING: BALLISTIC PRODUCTS, INC. DISCLAIMS ALL POSSIBLE LIABILITY FOR DAMAGES, INCLUDING ACTUAL, INCIDENTAL, AND CONSEQUENTIAL, RESULTING FROM USAGE OF INFORMATION OR ADVICE CONTAINED IN THIS AND OTHER PUBLICATIONS, LABELS, CATALOGS AND BOOKLETS. USE DATA AND ADVICE AT YOUR OWN RISK AND WITH CAUTION. WHERE DATA LIST SPECIFIC COMPONENTS, NO CHANGES OR SUBSTITUTIONS FOR THESE COMPONENTS CAN BE MADE WITHOUT RISKING SIGNIFICANT CHANGES IN THE LEVEL OF BALLISTIC PERFORMANCE AND/OR SAFETY OF THE LOADS SHOWN. FOLLOW LOADING DATA EXACTLY AND DO NOT SUBSTITUTE COMPONENTS. WE MAKE NO WARRANTIES EXPRESS OR IMPLIED, LIMITED OR FULL. FAILURE TO COMPLY WITH THESE AND OTHER STANDARDS OF RELOADING MAY RESULT IN ACCIDENTS WITH SERIOUS INJURY AND/OR DEATH TO THE SHOOTER AND/OR BYSTANDERS. KEEP OUT OF REACH OF CHILDREN. WE DISCLAIM ANY AND ALL LIABILITY FOR DAMAGE OR INJURY THAT MAY RESULT FROM YOUR HANDLOADED SHOTSHELLS AS WE HAVE NO CONTROL OVER ANY OF THE NUMEROUS POSSIBLE VARIATIONS IN COMPONENT PRODUCTION LOTS, IN TOOL AND DIE DIMENSIONS, IN YOUR LOADING PRACTICES AND PROCEDURES. THE INDIVIDUAL RELOADER IS SOLELY RESPONSIBLE FOR ANY VARIATION THAT MAY BE INCURRED BY ASSEMBLED AMMUNITION. TO AVOID SERIOUS INJURY OR DEATH TO SHOOTER AND BYSTANDERS, THIS PRODUCT SHOULD ONLY BE USED IN GUNSMITH-INSPECTED GUNS DESIGNED FOR MODERN SHOTSHELLS. IF GUN FAILS TO FIRE, KEEP POINTED IN SAFE DIRECTION FOR 30 SECONDS, THEN UNLOAD CAREFULLY. WEAR EYE AND EAR PROTECTION AND OBSERVE PROPER GUN SAFETY AT ALL TIMES. ALL PRODUCTS SOLD "AS IS".

ITALICIZED COMPONENTS ARE NO LONGER IN PRODUCTION, BUT MAY STILL BE FOUND IN CIRCULATION. CONSULT YOUR RELOADING MANUAL FOR ADDITIONAL DETAILS AND INFORMATION.