



BPI LOAD GUIDE:


COMMANDER 12GA 15MM WAD

WWW.BALLISTICPRODUCTS.COM

LOADING THE COMMANDER 15MM

The Commander 15mm is the shorter version of our successful Trap Commander wad. This may be one of the easiest wads you'll will ever load because of its ease of adjustment. The design even improves final crimps by adjusting to a final "nudge" as the shell is closed, compressed for solid ignition.

The shotcup section holds a 1-1/8 ounce payload. Improved patterns and solid performance make this wad a crossing shot specialist. Great for crossing and handicap trap-shots. Also available in 16 and 20 gauge.

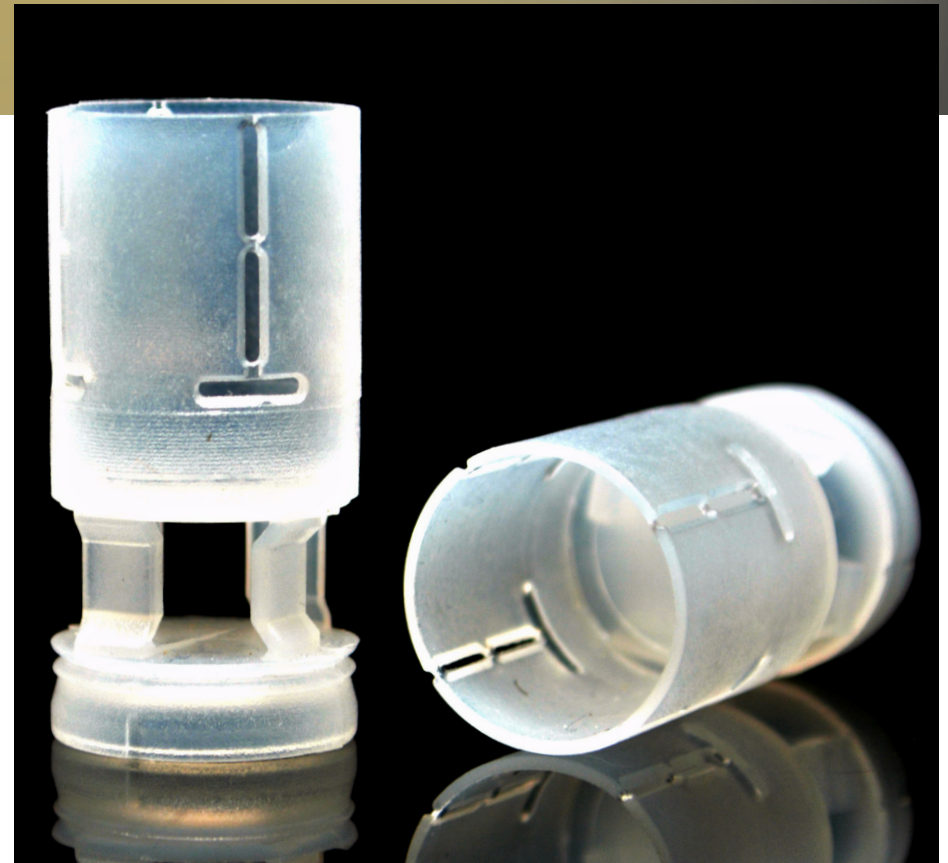

WAD SPECIFICATIONS:

- Overall length: 1.590"
- Shotcup depth: 0.750"
- Diameter: 0.729"
- Product Type: Wad, 12-gauge 2-3/4", pre-slit
- Typical Loads: 1-1/8 oz., great for crossing and handicap trap shots

LOAD ID	GA.	HULL	PRIMER	POWDER	POWDER GRNS.	GAS SEAL	WAD	FILLER WADS & LOAD INSERTS	OVER SHOT	SHOT (OZ.)	SHOT (GRNS.)	SHOT SIZE	BUFFER (GRAINS)	PSI	FPS
12-GAUGE • 2-3/4" LENGTH • LEAD SHOT • FOLD CRIMP															
160610-8142	12	Cheddite	Ched209	Green Dot	28.0		Z15	X-Stream Spreader	OS12	7/8	382.8	Lead #6		9300	1530
160613-8151	12	Cheddite	Ched209	Green Dot	30.0		Z15	X-Stream Spreader	OS12	7/8	382.8	Lead #6		9700	1580
160613-8152	12	Cheddite	Ched209	Green Dot	32.0		Z15	X-Stream Spreader	OS12	7/8	382.8	Lead #6		10100	1635
160614-8153	12	Cheddite	Ched209	Green Dot	29.0		Z15		OS12	1	437.5	Lead #4/#5		10300	1515
160613-8149	12	Cheddite	Ched209	800-X	32.0		Z15		OS12	1 1/8	492.2	Lead #4/#5		10400	1500
160614-8154	12	Cheddite	Ched209	Unique	32.0		Z15		OS12	1 1/8	492.2	Lead #4/#5/#6		10100	1455
160610-8143	12	Cheddite	Ched209	800-X	30.0		Z15		OS12	1 1/4	546.9	Lead #6		10600	1415
160614-8156	12	Cheddite	Ched209	Longshot	38.5		Z15		OS12	1 1/4	546.9	Lead #6/#5/#4		10200	1530
160610-8144	12	Cheddite	Ched209	Unique	30.0		Z15			1 1/4	546.9	Lead #6		10000	1390
160613-8150	12	Cheddite	Ched209	Unique	32.0		Z15			1 1/4	546.9	Lead #4/#5		10900	1460
160610-8145	12	Cheddite	Ched209	Universal	26.0		Z15		OS12	1 1/4	546.9	Lead #6		9500	1290
160613-8146	12	Cheddite	Ched209	Universal	28.0		Z15		OS12	1 1/4	546.9	Lead #6/#5/#4		9800	1335
160614-8155	12	Cheddite	Ched209	Universal	29.0		Z15		OS12	1 1/4	546.9	Lead #6/#5/#4		10500	1375

WARNING: BALLISTIC PRODUCTS, INC. DISCLAIMS ALL POSSIBLE LIABILITY FOR DAMAGES, INCLUDING ACTUAL, INCIDENTAL, AND CONSEQUENTIAL, RESULTING FROM USAGE OF INFORMATION OR ADVICE CONTAINED IN THIS AND OTHER PUBLICATIONS, LABELS, CATALOGS, TESTING REPORTS AND BOOKLETS. USE DATA AND ADVICE AT YOUR OWN RISK AND WITH CAUTION. WHERE DATA LIST SPECIFIC COMPONENTS, NO CHANGES OR SUBSTITUTIONS FOR THESE COMPONENTS CAN BE MADE WITHOUT RISKING SIGNIFICANT CHANGES IN THE LEVEL OF BALLISTIC PERFORMANCE AND/OR SAFETY OF THE LOADS SHOWN. FOLLOW LOADING DATA EXACTLY AND DO NOT SUBSTITUTE COMPONENTS. WE MAKE NO WARRANTIES EXPRESS OR IMPLIED, LIMITED OR FULL, AND WE DISCLAIM ANY SUCH WARRANTIES. FAILURE TO COMPLY WITH THESE AND OTHER STANDARDS OF RELOADING MAY RESULT IN ACCIDENTS WITH SERIOUS INJURY AND/OR DEATH TO THE SHOOTER AND/OR BYSTANDERS. KEEP OUT OF REACH OF CHILDREN. WE DISCLAIM ANY AND ALL LIABILITY FOR DAMAGE OR INJURY THAT MAY RESULT FROM YOUR HANDLOADED SHOTSHELLS AS WE HAVE NO CONTROL OVER ANY OF THE NUMEROUS POSSIBLE VARIATIONS IN COMPONENT PRODUCTION LOTS, IN TOOL AND DIE DIMENSIONS, IN YOUR LOADING PRACTICES AND PROCEDURES. THE INDIVIDUAL RELOADER IS SOLELY RESPONSIBLE FOR ANY VARIATION THAT MAY BE INCURRED BY ASSEMBLED AMMUNITION. TO AVOID SERIOUS INJURY OR DEATH TO SHOOTER AND BYSTANDERS, THIS PRODUCT SHOULD ONLY BE USED IN GUNSMITH-INSPECTED GUNS DESIGNED FOR MODERN SHOTSHELLS. IF GUN FAILS TO FIRE, KEEP POINTED IN SAFE DIRECTION FOR 30 SECONDS, THEN UNLOAD CAREFULLY. WEAR EYE AND EAR PROTECTION AND OBSERVE PROPER GUN SAFETY AT ALL TIMES. ALL PRODUCTS SOLD "AS IS".